

bizhub 215

✓ Functionality







- Black & white – PCL/GDI – Local/Network



- Colour
- Scan-to-FTP Scan-to-USB TWAIN Network - Black & white - Scan-to-eMail - Scan-to-SMB




– Super G3 Fax – i-Fax



Technology



Option diagram

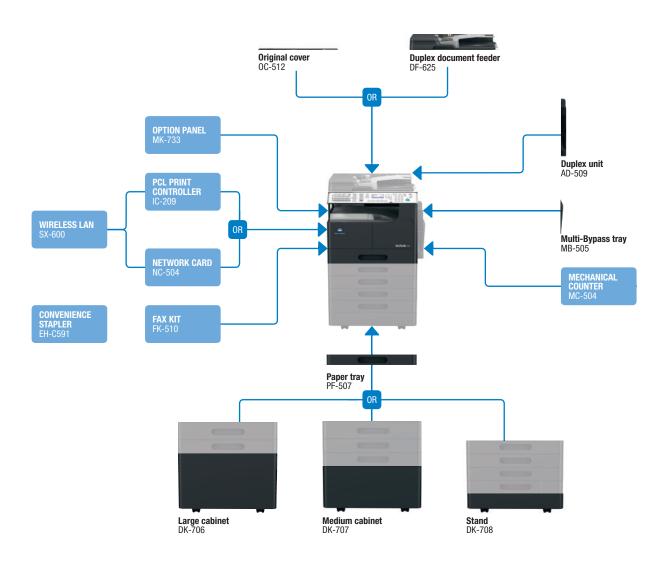

Finishing



Descriptions

bizhub 215	Fully multifunctional A3 b/w device with 21 ppm;
	standard copy, print (GDI) and colour scanning
	functionality (incl. Scan-to-USB); paper capacity of
	250; 128 MB standard memory; USB 2.0 interface
DF-625 Document feeder	Automatic document feeding of up to 70 sheets
OC-512 Original cover	Cover (instead of ADF)
PF-507 Paper cassette	B5-A3, 250 sheets, 64-90 gsm, up to four can be
	equipped
DK-706 Desk (large)	For 0 or 1 x PF-507
DK-707 Desk (medium)	For 2 x or 3 x PF-507
DK-708 Desk (small)	For 4 x PF-507

AD-509 Duplex unit	For duplex prints and copies
MB-505 Bypass tray	For special media
FK-510 Fax kit	Super G3 fax
IC-209 Controller	PCL print controller for PCL printing incl. network
	functionality
NC-504 Network	Network functionality (print and scan) if IC-209 is
interface card	not installed
MK-733 Optional panel	Needed for scan and fax function
MC-504 Mechanical counter	For mechanical counting
SX-600 Wireless LAN	Wireless LAN to network connector
EH-C591 Convenience stapler	Convenient stapling of up to 50 prints per set

Technical specifications

COPIER SPECIFICATIONS

Copying process	Laser electrostatic image transfer
Toner system	Simitri®HD polymerised toner
Copy/print speed A4	Up to 21 ppm
Copy/print speed A3	Up to 7.8 ppm
Autoduplex speed A4	Up to 15.8 ppm
(optional)	
1st copy out time	Less than 6.5 sec.
Warm-up time	Less than 15 sec.
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multi-copy	1–999
Original format	A5-A3
Magnification	25-400% in 0.1% steps; auto-zooming
Copy functions	2in1; 4in1; book copy; ID copy; shift margin; erase;
	image rotation; program registration

PRINTER SPECIFICATIONS

Print resolution	GDI: 600 x 600 dpi;
Time roodiation	PCL (optional): 1,200 x 600 dpi
Controller CPU	120 MHz
Page description	GDI;
language	PCL 6/5e (optional)
Operating systems	Windows XP (32/64)
	Windows Vista (32/64)
	Windows 7 (32/64)
	Windows Server 2003/2008 (32/64), 2008 R2 (64)
Printer fonts	53 PCL Latin
Print functions	N-up; watermark; secure print; image rotation

SCANNER SPECIFICATIONS

Scan speed	Up to 46 opm (300 dpi via optional ADF)	
(mono/colour)	Up to 20 opm (150 dpi via optional ADF)	
Scan resolution	Max.: 600 x 600 dpi	
Scan modes	Scan-to-eMail (optional);	
	Scan-to-SMB (optional);	
	Scan-to-FTP (optional);	
	Scan-to-USB	
	Local TWAIN scan;	
	Network TWAIN scan (optional);	
File formats	PDF; JPEG; TIFF	_
Scan destinations	32 one-touch destinations;	
	250 speed dial destinations; LDAP support	



FAX SPECIFICATIONS

Fax standard	Super G3 (optional)
Fax transmission	Analogue;
	i-Fax
Fax resolution	Standard; Fine; Super-fine
	Max.: 408 x 392 dpi
	(Super-fine via optional ADF)
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	32 one-touch destinations; 250 speed dial destinations
Fax functions	PC fac; polling; forward; phone book; redial

SYSTEM SPECIFICATIONS

System memory	128 MB
Interface	USB 2.0
	10Base-T/100Base-TX Ethernet (optional)
Network protocols	TTCP/IP (IPv4; IPv6); HTTP; SNMP
Automatic document	Reverse type; up to 70 originals; A5–A3
feeder	35–128 gsm simplex; 50–128 gsm duplex
Printable paper size	A5–A3
Customised paper sizes	90–297 x 140–432 mm
Printable paper weight	64–157 gsm
Paper input capacity	Standard: 250 sheets;
	max.: 1,350 sheets
Paper tray 1	250 sheets; B5–A3;
	Customised paper sizes
	(90-297 x 140-432 mm);
	64-157 gsm
Paper tray 2-5	250 sheets; B5–A3;
(optional)	Customised paper sizes
	(140-297 x 140-432 mm);
	64-90 gsm
Manual bypass	100 sheets; A5–A3;
(optional)	Customised paper sizes
	(182-297 x 182-432 mm);
	64-157 gsm
Automatic duplexing	A5–A3; 64–90 gsm
(optional)	
Finishing modes	Group; sort; crisscross
Output capacity	Max.: 250 sheets
Copy/print volume	Rec.: 3,000 pages;
(monthly)	Max.: 15,000 pages
Toner lifetime	Up to 12,000 pages
Power consumption	220-240 V / 50/60 Hz; less than 1.25 kWh
System dimensions	570 x 570 x 458 mm
(W x D x H)	
System weight	26.5 kg

SYSTEM FEATURES

Accounting	Up to 50 accounts
Software	PageScope Web Connection;
	PageScope NetCare Device Manager

- All specifications refer to A4-size paper of 80 gsm quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- operating systems, applications aid network products as well as fretwork and system comigurations.

 The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4).

 The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.

 Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.

 All brand and product names may be registered trademarks or trademarks of their respective. holders and are hereby acknowledged.















